



# Voltage Repeater

## HiC2065

- 1-channel isolated barrier
- 24 V DC supply (bus powered)
- Voltage input 0 mV ... ± 50 mV
- Voltage output 0 mV ... ± 50 mV
- Selectable up/downscale sensor breakage detection
- Fault output signal




### Function

This isolated barrier is used for intrinsic safety applications. It transfers low voltage signals from thermocouples, load cells, strain gauges, operational amplifiers, and inductive oscillation sensors located in hazardous areas to safe areas. The input voltage of the terminals 5a and 5b is transferred to the terminals 7a and 8a. The input, output, and power supply are galvanically isolated from each other. Upscale or downscale lead breakage monitoring is selectable via switches located on the front panel of the device.

**Note:** This unit requires three minutes after power-up to reach the accuracy cited in the technical data.

### Connection

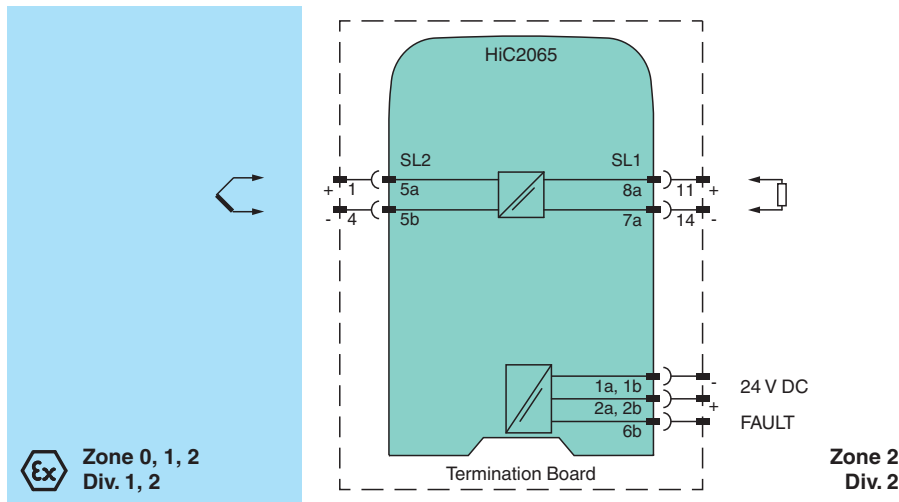

Release date: 2020-07-31 Date of issue: 2020-07-31 Filename: 204304\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com


USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

## Configuration

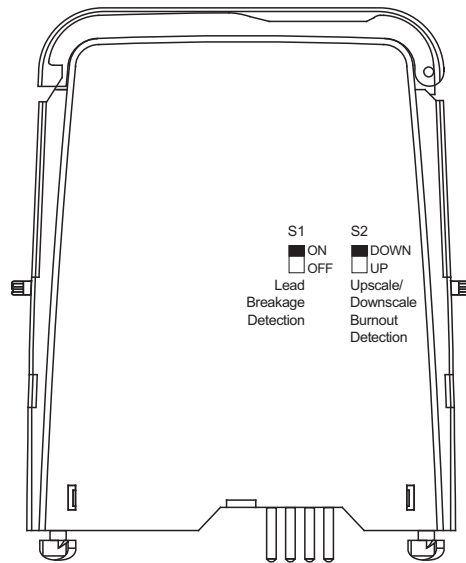

## Dimensions

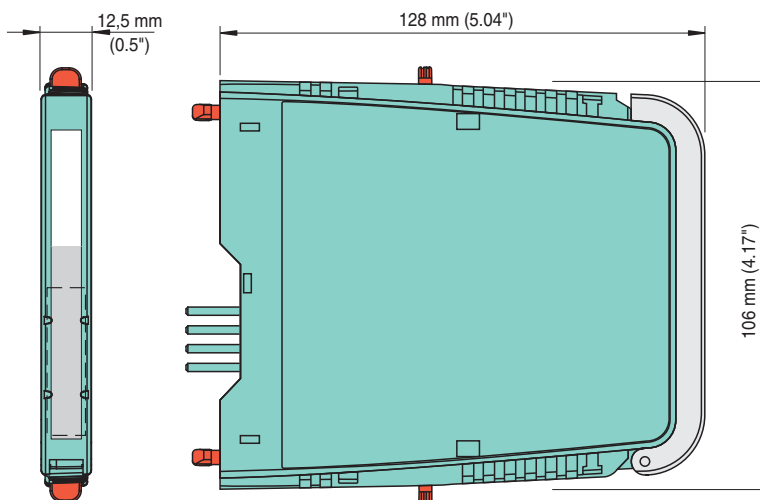

## Technical Data

### General specifications

Signal type Analog input

### Supply

Connection SL1: 1a, 1b(-); 2a, 2b(+)

Rated voltage  $U_r$  20 ... 30 V DC bus powered via Termination Board

Ripple within the supply tolerance

## Technical Data

Rated current	$I_r$	$\leq 22 \text{ mA}$
Power dissipation/power consumption		0.7 W max.
Lockout voltage		$> 11 \text{ V DC}$
<b>Input</b>		
Connection side		field side
Connection		SL2: 5a(+), 5b(-)
Input resistance		$\geq 16 \text{ M}\Omega$
Transmission range		$0 \dots \pm 50 \text{ mV}$
Offset voltage/current		$\leq 5 \mu\text{V} / \leq 5 \text{ nA}$
<b>Output</b>		
Connection side		control side
Connection		SL1: 8a(+), 7a(-)
Voltage		$0 \dots \pm 50 \text{ mV}$
Load		Accuracy figures for infinite load impedance. Additional 0.03 % of span for a load resistance of $10 \text{ k}\Omega$
Output resistance		max. $3 \Omega$
Line fault detection		input: $\pm 100 \text{ mV}$ output: $+200 \text{ mV}, -115 \text{ mV}$
<b>Fault indication output</b>		
Connection		SL1: 6b
Output type		open collector transistor (internal fault bus)
Fault voltage		$< V_{cc}/2$ (when connected to $V_{cc}$ via $10 \text{ k}\Omega$ pull up resistor)
<b>Transfer characteristics</b>		
Deviation		
After calibration		at $20 \text{ }^\circ\text{C}$ ( $68 \text{ }^\circ\text{F}$ ): $\pm 3 \mu\text{V}$ up to $\pm 10 \text{ mV} / \pm 0.05 \%$ of the span up to $+50 \text{ mV} / \pm 0.05 \%$ of the span up to $-50 \text{ mV}$
Influence of ambient temperature		$\pm 1 \mu\text{V/K}$ (typical $\pm 0.25 \mu\text{V/K}$ )
Absolute		$< 0.25 \text{ K}$ at $30 \text{ V}$ voltage supply
Bandwidth		DC to $> 350 \text{ Hz}$ ( $-3 \text{ dB}$ )
Settling time		$< 2 \text{ ms}$
Rise time/fall time		$\leq 1 \text{ ms}$
<b>Galvanic isolation</b>		
Output/power supply		functional insulation, rated insulation voltage $50 \text{ V AC}$
<b>Indicators/settings</b>		
Display elements		LEDs
Control elements		DIP-switch
Configuration		via DIP switches
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Electromagnetic compatibility		
		NE 21:2006 For further information see system description.
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1
<b>Ambient conditions</b>		
Ambient temperature		$-20 \dots 60 \text{ }^\circ\text{C}$ ( $-4 \dots 140 \text{ }^\circ\text{F}$ )
<b>Mechanical specifications</b>		
Degree of protection		IP20
Mass		approx. $100 \text{ g}$
Dimensions		$12.5 \times 128 \times 106 \text{ mm}$ ( $0.5 \times 5.1 \times 4.2 \text{ inch}$ )
Mounting		on Termination Board

Release date: 2020-07-31 Date of issue: 2020-07-31 Filename: 204304\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com


**PEPPERL+FUCHS**

## Technical Data

Coding	pin 2, 3 and 4 trimmed For further information see system description.		
<b>Data for application in connection with hazardous areas</b>			
EU-type examination certificate	BASEEFA 10 ATEX 0031X		
Marking	Ⓔ II (1)GD, I (M1), [Ex ia] IIC, [Ex iaD], [Ex ia] I (-20 °C ≤ T <sub>amb</sub> ≤ 60 °C) [circuit(s) in zone 0/1/2]		
Voltage	U <sub>o</sub>	5.5 V DC	
Current	I <sub>o</sub>	2.4 mA	
Power	P <sub>o</sub>	3.3 mW	
Supply			
Maximum safe voltage	U <sub>m</sub>	253 V (Attention! The rated voltage can be lower.)	
Certificate	BASEEFA 10 ATEX 0032X		
Marking	Ⓔ II 3G Ex nA II T4		
Galvanic isolation			
Input/Output	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V		
Input/power supply	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V		
Directive conformity			
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010		
<b>International approvals</b>			
UL approval			
Control drawing	116-0317 (cULus)		
IECEx approval	IECEx BAS 10.0012X IECEx BAS 10.0013X		
Approved for	[Zone 0] [Ex ia] IIC, [Ex iaD], [Ex ia] I Ex nA II T4		
<b>General information</b>			
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .		

## Assembly

### Front view

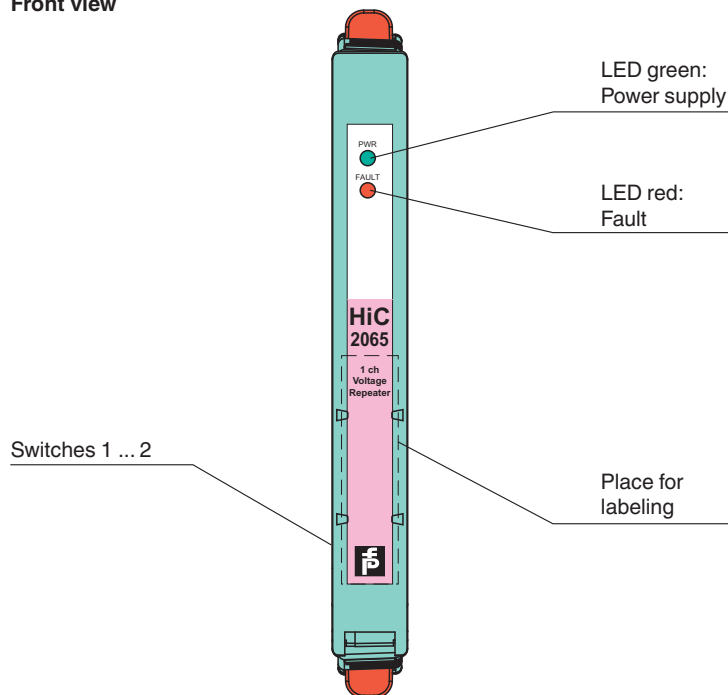

## Configuration

Configure the device in the following way:

- Push the red Quick Lok Bars on each side of the device in the upper position.
- Remove the device from Termination Board.
- Set the DIP switches according to the figure.



*The pins for this device are trimmed to polarize it according to its safety parameter. Do not change!  
For further information see system description.*