

## Ground Fault Detection KFD2-ELD-Ex16

- 16-channel isolated barrier
- 24 V DC supply (Power Rail)
- Analog or digital field device inputs
- Monitors leakage current
- Fault relay contact output
- LED status indication
- Test circuit for validation
- Parallel connection for easy integration
- Conformal coating

24 V DC



### Function

This isolated barrier is used for intrinsic safety applications.


The device detects ground faults on field lines.

The 16 channels of the device continuously monitor galvanically isolated circuits and warns if their resistance to ground falls below 10 kΩ.

During an alarm condition, the appropriate channel LED is illuminated and the change-over contact is initiated (S1 = position I). The function of this relay can be reversed with switch S1 (S1 = position II).

A self-test can be activated via the test input of the device. The device reacts by switching the relay. The self-test can be triggered manually by the user or remotely by the control system.

### Connection

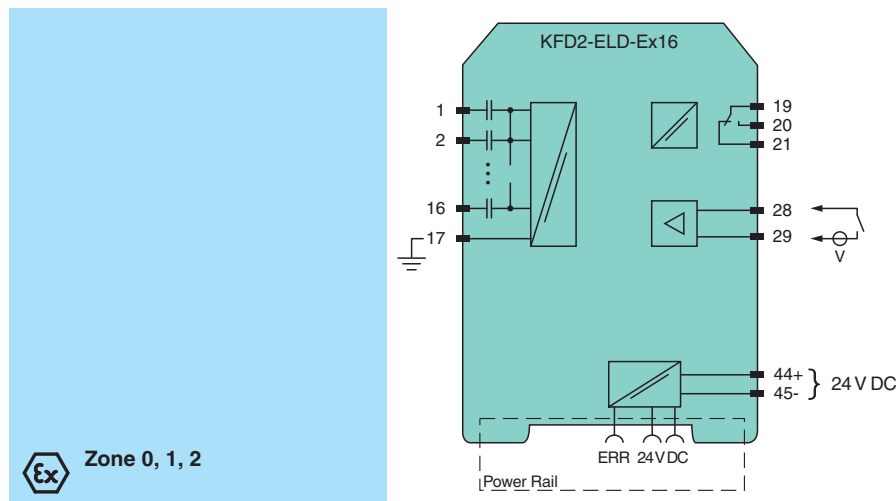

### Technical Data

#### General specifications

Signal type		Analog input	
Supply			
Connection		Power Rail or terminals 44+, 45-	
Rated voltage	U <sub>r</sub>	20 ... 30 V DC	
Ripple		≤ 10 %	
Rated current	I <sub>r</sub>	≤ 50 mA	
Input			
Connection side			field side

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data


Connection	intrinsically safe: terminals 1 ... 16 non-intrinsically safe: terminals 28, 29	
Ground connection		terminal 17
Rated values	5 V <sub>pp</sub> , 0.1 mA; rectangular	
Function		Test input: 24 V DC / 5 mA; non-polarized
<b>Output</b>		
Connection side		control side
Connection		terminals 19, 20, 21
Output		signal ; relay
Contact loading	253 V AC/2 A /cos $\phi$ > 0.7; 40 V DC/2 A resistive load;	
Mechanical life		10 <sup>7</sup> switching cycles
<b>Transfer characteristics</b>		
Response delay		≤ 50 s
<b>Galvanic isolation</b>		
Input/Output		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Input/power supply		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output/power supply		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
<b>Indicators/settings</b>		
Display elements		LEDs
Control elements		DIP-switch
Configuration		via DIP switches
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Low voltage		
Directive 2014/35/EU		EN 61010-1:2010
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2007
Degree of protection		IEC 60529:2001
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 260 g
Dimensions		60 x 119 x 115 mm (2.4 x 4.7 x 4.5 inch) , housing type D2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate		TÜV 00 ATEX 1585
Marking		⊕ II (1)G [Ex ia Ga] IIC ⊕ II (1) D [Ex ia Da] IIIC ⊕ I (M1) [Ex ia Ma] I
Voltage	U <sub>o</sub>	7.2 V
Current	I <sub>o</sub>	1.7 mA
Power	P <sub>o</sub>	3 mW
Supply		
Maximum safe voltage	U <sub>m</sub>	40 V DC (Attention! The rated voltage can be lower.)
Collective error message		
Maximum safe voltage	U <sub>m</sub>	40 V (Attention! The rated voltage can be lower.)
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 233849\_eng.pdf

Technical Data

Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Assembly

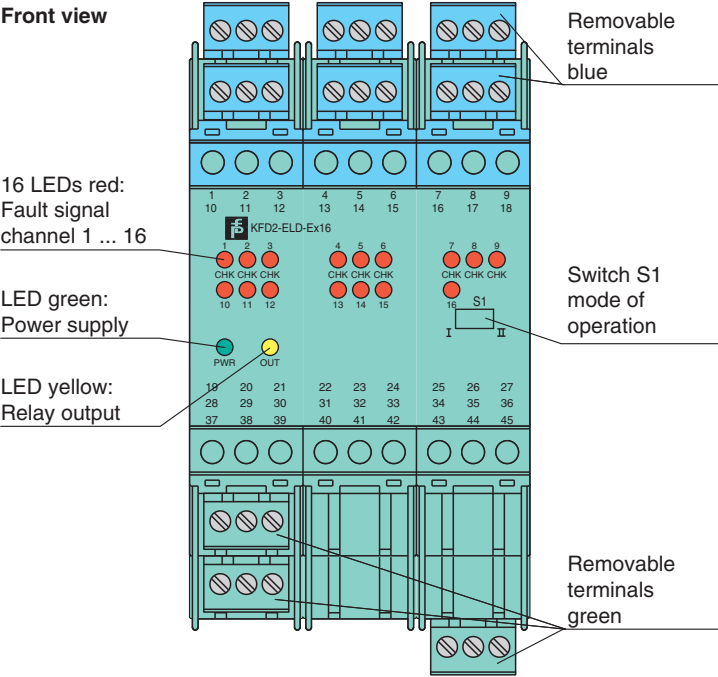

Accessories

	<b>KFD2-EB2</b>	Power Feed Module
	<b>UPR-03</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	<b>UPR-03-M</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	<b>UPR-03-S</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	<b>K-DUCT-BU</b>	
	<b>K-DUCT-BU-UPR-03</b>	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side blue

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 233849\_eng.pdf