



**Model Number**

OIT500-F113-B12-CB


**Features**

- High-temperature code carrier up to 500 °C (932 °F)
- Sturdy and compact design
- Integrated illumination
- High operating range
- Large sensing range
- High depth of focus

**Function**

The OIT\* stationary read device is an optical identification system that works using industrial vision methods and is used in automated manufacturing processes. The ambient conditions in automobile construction in particular, for example the cyclical temperature changes, often make the use of read-only tags with electronic components difficult if not impossible. For the OIT high-temperature identification system, read-only tags of solid metal plates with a perforated matrix are used, which are designed for use at temperatures of up to 500 °C and suitable for high mechanical stress. Simple installation and commissioning without complicated, time-consuming Teach-In processes enable rapid entry. Pluggable connections for the rapid exchange of devices and a controller with simple command set via the Ethernet interface guarantee simple operation. A scratch-resistant, replaceable quartz glass panel and sturdy metal housing make the OIT\* a robust, efficient identification system.


**Indicating / Operating means**

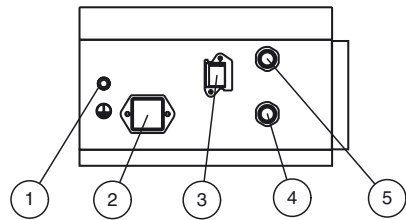

1	Grounding screw
2	Power supply
3	Network
4	Trigger
5	external illumination


**Electrical connection**

**8-pin Network connection**  
(LAN)




Pin	Signal
1	Transmit data (+)
2	Transmit data (-)
3	Receive data (+)
4	not assigned
5	not assigned
6	Receive data (-)
7	not assigned
8	not assigned

**4-pin M12 socket**  
(external illumination)




Pin	Signal
1	24 V power supply
2	Laser control
3	Ground
4	Illumination control

**8-pin Harting connection**  
(Process)



Pin	Signal
1	Composite error output
2	External ground
3	Mode bit 1
4	Mode bit 0
5	24 V external power supply
6	24 V device power supply
7	Trigger release input
8	Device ground

**4-pin M12 socket**  
(Trigger)



Pin	Signal
1	24 V power supply
2	not assigned
3	Ground
4	Trigger signal

**Technical data**

**General specifications**

Light source	Integrated LED lightning
Light type	infrared

Release date: 2019-08-23 11:04 Date of issue: 2019-08-23 194232\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Symbologies	Hole matrix Data format: decimal Data capacity: 6 (numerical) Orientation: omnidirectional
Read distance	200 ... 450 mm
Depth of focus	± 50 mm
Reading field	330 mm x 250 mm at max. read distance
Evaluation frequency	5 Hz
Target velocity	triggered ≤ 0.5 m/s
<b>Functional safety related parameters</b>	
MTTF <sub>d</sub>	51 a
Mission Time (T <sub>M</sub> )	10 a
Diagnostic Coverage (DC)	0 %
<b>Indicators/operating means</b>	
Operation indicator	LED green: supply LED green: ready
Function indicator	Yellow LED: trigger Yellow LED: code read Red LED: pre-fault Red LED: group error
<b>Electrical specifications</b>	
Operating voltage	U <sub>B</sub> 24 V DC ± 15% , PELV
Operating current	I <sub>B</sub> 250 mA without output drivers
<b>Interface</b>	
Physical	Ethernet
Protocol	TCP/IP
Transfer rate	100 MBit/s
<b>Input</b>	
Input voltage	to be applied externally 24 V ± 15% PELV
Number/Type	1 trigger input 2 control unit inputs , optically decoupled
Input current	approx. 1 mA at 24 V DC
<b>Output</b>	
Number/Type	1 electronic output, PNP, optically decoupled
Switching voltage	to be applied externally 24 V ± 15 % PELV
Switching current	100 mA each output
<b>Ambient conditions</b>	
Ambient temperature	0 ... 45 °C (32 ... 113 °F)
Storage temperature	-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>	
Degree of protection	IP64
Connection	8-pin Harting HAN RJ-45 2 x 5-pin M12 socket Supplied ferrite sleeve for suppression of the Ethernet cable
<b>Material</b>	
Housing	diecast aluminum powder coated
Mass	approx. 4000 g
<b>Compliance with standards and directives</b>	
Directive conformity	
EMC Directive 2004/108/EC	EN 61326-1 , EN 61000-6-4
Standard conformity	
Noise immunity	EN 61326-1
Emitted interference	EN 61000-6-4:2007/A1:2011
Degree of protection	EN 60529
<b>Approvals and certificates</b>	
EAC conformity	TR CU 020/2011

**Accessories****OIC-C10V2A-CB1**

Code carrier for optical high-temperature identification system, stainless steel

**V8HAN-G-10M-PVC-ABG**

Female cordset, Harting, 8-pin, shielded, PVC cable

**V45-GP-10M-PUR-ABG-V45-G**

Connecting cable, RJ-45 to RJ-45, PUR cable

**V45-GP**

Field-attachable "Push-Pull" connector

**V45-G**

Field-attachable male connector

**V1S-G-10M-PVC**

Cable connector, M12, 4-pin, PVC cable

**V8HAN-G**

Female connector, Harting, 8-pin, field attachable

**OITControl**

Software for OIT high temperature identification system


**OIZ-FG500**

Replacement glass for series OIT300, OIT500 and OIT1500


Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)



Notes

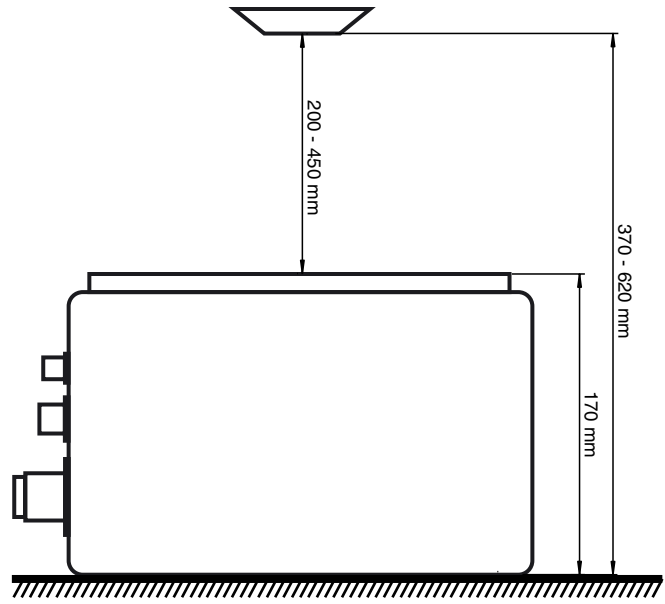

Dimensions

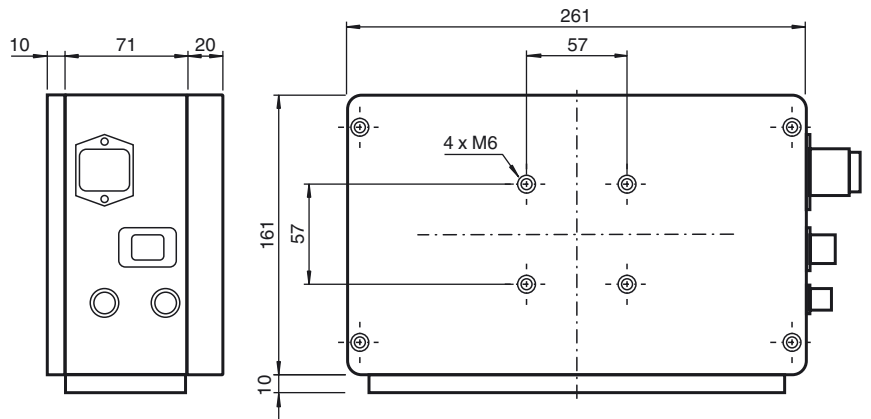

Release date: 2019-08-23 11:04 Date of issue: 2019-08-23 194232\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".