




Main features


- Amplified output signal
- Temperature limits:
 - 40 ... + 750° C for type J
 - 40 ... + 900° C or type E
 - 40 ... + 1000° C or type K
 (see table for sheath diameters)
- Tolerance (IEC standard 584.2/Class 2):
 - $\pm 2.5^{\circ} \text{C}$ (- 40 ... + 333° C)
 - $\pm 0.0075 [t]$ ($t > + 333^{\circ} \text{C}$)
- Ceramic insulation of the thermocouple element
- Application versatility

MODELS


AC8 A
without fitting

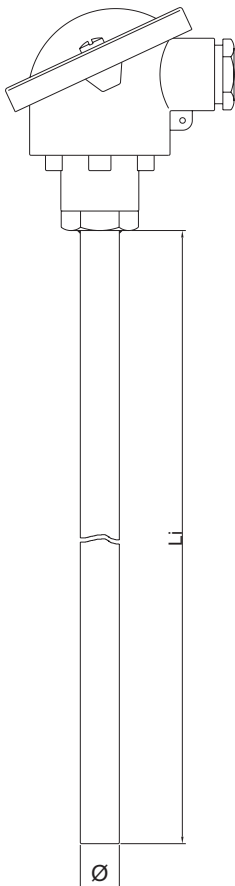


AC8 B
with adjustable flange

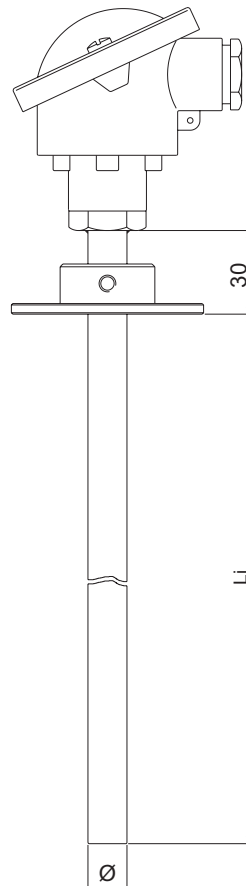

AC8 C
with welded fitting

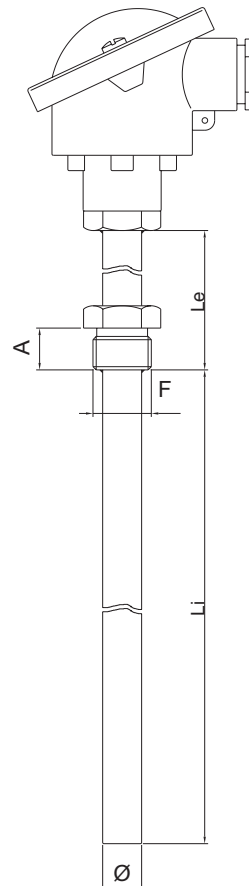

AC8 D
with welded fitting under the head

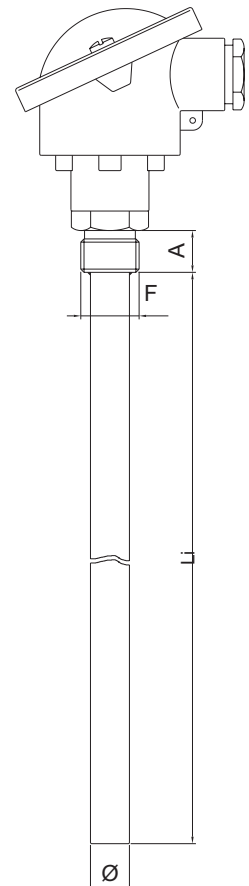

ORDER CODE

A C 8 | | | | | | | | 0 | 0 0 0 X | | | | X | | | | | | A |

CODE

Model	
Without fitting	A
With adjustable flange	B
With welded fitting	C
With welded fitting under the head	D

Element + Hot Junction	
Single Insulated	1
Single Grounded	2

Thermocouple Type	
Fe - Cu/Ni	J
Ni/Cr - Ni/Al	K
Ni/Cr - Cu/Ni	E

Connection Head	
DIN B	C
DIN A	D
DIN BUS	E
EEX d IIC 2GD	F
CEAA	H

Sheath Material	
AISI 304	A
AISI 310	B
AISI 316	C
INCONEL 600	F

Sheath Diameter (mm)	
16	O
17.2 (3/8")	P
21.3 (1/2")	Q
26.7 (3/4")	T

Connection Thread (*)		
1/2" GAS	"A"= 15mm	D
3/4" GAS	"A"= 18mm	E
1" GAS	"A"= 18mm	F
1/2" NPT		J
3/4" NPT		K
1" NPT		L

(*) Only for C and D models

Conn. / Flange Material		
300 series stainless steel	2	*
Aluminium	4	**
Carbon steel	5	**

(*) For fittings only
(**) For flanges only

Sensors amplifiers are manufactured in compliance with:
- EMC 2014/30/EU compatibility directive
- RoHS 2011/65/EU directive

	Mod. C - D
MOUNT (F)	A (mm)
G 1/2	15
G 3/4	18
G 1	20
1/2 NPT	20
3/4 NPT	20
1 NPT	25

Availability of Mounts /Sheathing Diameter				
MOUNT. (F)	ø16	ø17.2	ø21.3	ø26.7
G 1/2	x	-	-	-
G 3/4	x	x	x	-
G 1	x	x	x	x
1/2 NPT	x	-	-	-
3/4 NPT	x	x	x	x
1 NPT	x	x	x	x

Certificates
A Conformity Report

LENGTHS AND ACCESSORIES





Type of Transmitter
A 4 ÷ 20mA

Li = Immersion Length (mm)
Standard length from 50 to 1000mm with 50mm step

Le = Extension Length (mm) *
Standard length from 10 to 200mm with 10mm step

(*) To be shown for AC8C model only

Temperature range in which the calibration has to be made			
T. min		T. max	
	°C		°C
	4mA		20mA

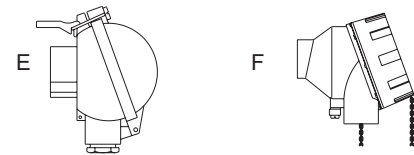

Electrical installation requirements and Conformity certificate are available on our web site: www.gefran.com

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice

GEFRAN

GEFRAN spa
via Sebina, 74
25050 PROVAGLIO D'ISEO (BS) - ITALIA
ph. 0309888.1 - fax. 0309839063
Internet: <http://www.gefran.com>

DTS_AC8_04-2016_ENG