



# Safety light curtain

## SLCS30-/35




- Resolution 30 mm (hand protection)
- Protection field height up to 2400 mm
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- SIL3 (IEC 61508)
- Sensing range up to 20 m
- Degree of protection IP67
- Temperature range -35 ... 60°C (-31 ... 140 °F)
- Slim design, mounting on three sides

### Safety light curtain



## Dimensions

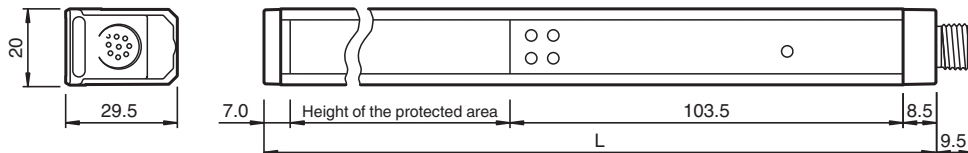

## Technical Data

### General specifications

Effective detection range	5 ... 20 m
Light source	IRED
Light type	modulated infrared light , 850 nm
Protection field height	see Table 1, max. 2400 mm

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 265788\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data


Operating mode	Startup/restart disable, deactivateable	
Optical resolution	30 mm	
Angle of divergence	< 5 °	
Ambient light limit	Not sensitive to ambient light in accordance with IEC 61496-2	
UL File Number	E215245	
<b>Functional safety related parameters</b>		
Safety Integrity Level (SIL)	SIL 3	
Performance level (PL)	PL e	
Category	Cat. 4	
Mission Time (T <sub>M</sub> )	20 a	
PFH <sub>d</sub>	Depending on the protection field height; see Manual	
Type	4	
<b>Indicators/operating means</b>		
Operation indicator	green: Power on	
Function indicator	Green: OSSD ON , Red: OSSD OFF	
Status indicator	Transmitter unit: LED yellow: Mode, test or error Receiver: LED yellow: Start readiness, function reserve or error	
<b>Electrical specifications</b>		
Operating voltage	U <sub>B</sub>	24 V DC (-20%, +30%) ; Power supply with safe isolation: 24 V DC
No-load supply current	I <sub>0</sub>	Transmitter unit: ≤ 150 mA Receiver: ≤ 150 mA (without outputs)
Protection class	III , IEC 61140	
Power consumption	P <sub>0</sub>	Transmitter unit: 5 W Receiver: 15 W
<b>Input 1</b>		
Input type	Transmitter unit test	
Input format	Break contact	
Switching voltage	24 V DC	
Input current	5 mA	
<b>Input 2</b>		
Input type	Transmitter unit, mode A/B	
Function	Beam Code A: open or 0 V Beam Code B: 24 V DC, 5 mA	
<b>Input 3</b>		
Input type	Receiver unit relay monitor	
Input format	Break contact	
Switching voltage	24 V DC	
Input current	5 mA	
<b>Input 4</b>		
Input type	Receiver unit, start release	
Input format	Break contact	
Input current	5 mA	
<b>Input 5</b>		
Input type	Receiver unit, mode A/B (see transmitter unit, mode A/B)	
<b>Output</b>		
Response time	see Table 1, max. 48 ms	
<b>Output 1</b>		
Output type	Receiver unit OSSD	
Signal output	PNP semiconductor , monitored for short and cross circuits	
Switching voltage	ON: U <sub>B</sub> - 2 V; OFF: < 1 V	
Switching current	ON: max. 0.1 A; OFF: < 5 μA	
<b>Output 2</b>		
Output type	Receiver signal output start readiness	
Signal output	PNP-semiconductor, short-circuit protected, 0.1A	

**Technical Data**

<b>Conformity</b>	
Functional safety	ISO 13849-1 ; EN 61508 part1-4
Product standard	EN 61496-1 ; IEC 61496-2
<b>Approvals and certificates</b>	
CE conformity	CE
UL approval	cULus Listed
CCC approval	CCC approval / marking not required for products rated ≤36 V
TÜV approval	TÜV
<b>Ambient conditions</b>	
Ambient temperature	-35 ... 60 °C (-31 ... 140 °F)
Storage temperature	-35 ... 70 °C (-31 ... 158 °F)
Relative humidity	max. 95 %, not condensing
<b>Mechanical specifications</b>	
Housing length L	see table 2
Degree of protection	IP67 , For indoor use only
Connection	Transmitter unit: 4-pin, M12 x 1 connector Receiver: 8-pin, M12 x 1 connector Cable cross section min. 0.25 mm <sup>2</sup> Max. cable length 50 m
<b>Material</b>	
Housing	extruded aluminum section , gold anodized
Optical face	Plastic pane , Transparent polycarbonate
Mass	see table 2
<b>General information</b>	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .


**Connection**

Transmitter unit:



Pin	Transmitter unit
1	24 V DC
2	Mode A/B
3	0 V DC
4	Test


Receiver unit:




Pin	Receiver unit
1	Restart Interlock (RI)
2	24 V DC
3	Relay Monitor (RM)
4	Status / Select RI-RM
5	OSSD1
6	OSSD2
7	0 V DC
8	Mode A/B

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 265788\_eng.pdf

## Assembly

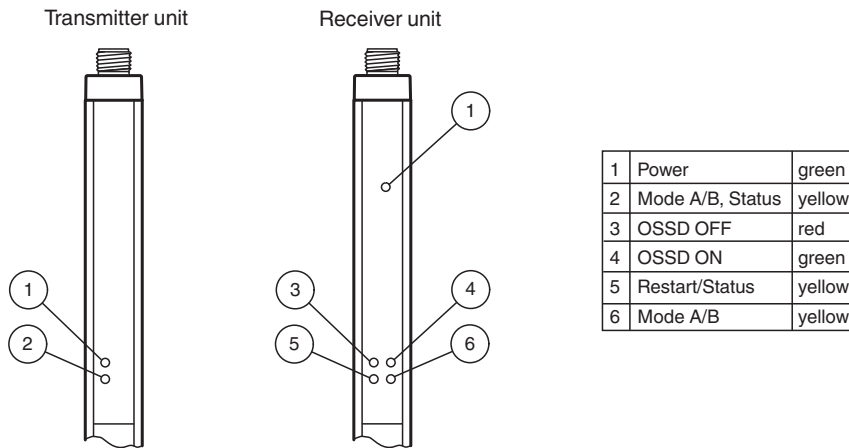

## Application

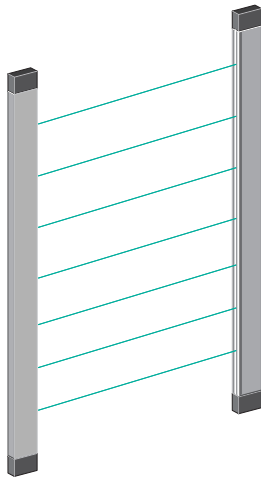








## Matching system components













	<b>SB4-OR-4XP-B-4159</b>	Safety control unit
	<b>SB4-OR-4XP</b>	Safety control unit
	<b>SB4-OR-4XP-B</b>	SB4 series safety control unit with 1 optional module slot for functional enhancement
	<b>SB4-OR-4XP-B-B</b>	SB4 series safety control unit with optional module slots for functional enhancement
	<b>SB4-OR-4XP-B-B-B</b>	SB4 series safety control unit with optional module slots for functional enhancement
	<b>SB4-OR-4XP-B-B-B-B</b>	SB4 series safety control unit with optional module slots for functional enhancement
	<b>SB4-OR-4XP-B-B-B-B-B</b>	SB4 series safety control unit with optional module slots for functional enhancement
	<b>SB4-OR-4XP-B-4158</b>	Safety control unit

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 265788\_eng.pdf

### Matching system components














	<b>SB4-OR-4XP-3819</b>	Safety control unit
	<b>SB4-OR-4XP-4M</b>	Safety control unit
	<b>SB4-OR-4XP-4MD</b>	Safety control unit
	<b>SB4-OR-4XP-4M-4136</b>	Safety control unit of series SB4
	<b>SB4-OR-4XP-4X</b>	Safety control unit
	<b>SB4-OR-4XP-4X-3819</b>	Safety control unit
	<b>SB4-OR-4XP-4136</b>	Safety control unit of series SB4

### Accessories

	<b>TR 14/30/50/60</b>	Test rod for safety light curtain SLCT
	<b>AA SLCT-01</b>	Profile alignment aid; simplified alignment of the SLCS and SLCT safety light curtains
	<b>OMH-SLCT-100-1200</b>	Mounting base for floor mounting and cover plate
	<b>OMH-SLCT-100-2100</b>	Mounting base for floor mounting and cover plate
	<b>OMH-SLCT-100-2500</b>	Mounting base for floor mounting and cover plate
	<b>OMH-SLCT-110-1200</b>	Mounting base for floor mounting with rear panel and cover plate
	<b>OMH-SLCT-110-1500</b>	Mounting base for floor mounting with rear panel and cover plate
	<b>OMH-SLCT-110-2100</b>	Mounting base for floor mounting with rear panel and cover plate
	<b>OMH-SLCT-120-1200</b>	Side protection for mounting base
	<b>OMH-SLCT-120-1500</b>	Side protection for mounting base
	<b>OMH-SLCT-120-2100</b>	Side protection for mounting base
	<b>OMH-SLCT-120-2500</b>	Side protection for mounting base

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 265788\_eng.pdf

**Accessories**

	<b>OMH-SLCT-200</b>	Floor mount
	<b>SLCT-M-01-1200</b>	Inclined mirror for stable 90° deflection with cover plate
	<b>SLCT-M-01-1500</b>	Inclined mirror for stable 90° deflection with cover plate
	<b>SLCT-M-01-2100</b>	Inclined mirror for stable 90° deflection with cover plate
	<b>OMH-SLCT-10</b>	Clamp mounting suitable for 6 mm ... 11.5 mm groove
	<b>OMH-SLCT-11</b>	Reverse clamp mounting suitable for 8.5 mm ... 10.5 mm groove
	<b>OMH-SLCT-12-500</b>	Mounting bracket, muting arm with round rod d=12 mm
	<b>OMH-SLCT-01</b>	Quick clamp and adjustment system
	<b>OMH-SLCT-02</b>	Attachment aid for OMH-SLCT-01
	<b>OMH-SLCT-03</b>	Mounting bracket including adjustment
	<b>OMH-SLCT-04</b>	Mounting bracket including adjustment (with loose bearing)
	<b>OMH-SLCT-05</b>	Mounting bracket including adjustment
	<b>OMH-SLCT-06</b>	Swivel Bracket

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 265788\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

## Technical Features

Table 1 - Response time:

Height of the protected area [mm]	Response time [ms]
100	8
200	10
300	11
400	12
500	14
600	15
700	16
800	17
900	19
1000	20
1100	21
1200	23
1300	24
1400	25
1500	26
1600	28
1700	29
1800	30
1900	32
2000	33
2100	34
2200	35
2300	37
2400	38

Table 2 - Total length and weight:

Height of the protected area [mm]	Total length of transmitter/receiver unit [mm]	Weight of transmitter/receiver unit [g]
100	219	140
200	319	200
300	419	250
400	519	310
500	619	370
600	719	430
700	819	480
800	919	540
900	1019	600
1000	1119	650
1100	1219	710
1200	1319	760

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 265788\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

Height of the protected area [mm]	Total length of transmitter/receiver unit [mm]	Weight of transmitter/receiver unit [g]
1300	1425	820
1400	1525	880
1500	1625	940
1600	1725	990
1700	1825	1050
1800	1925	1100
1900	2025	1160
2000	2125	1210
2100	2225	1270
2200	2325	1320
2300	2425	1380
2400	2525	1440

## Accessories

Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)


## Function

The safety light curtain consists of a transmitter and a receiver unit. The protected area is formed by infrared light beams transmitted from the transmitter unit to the receiver unit. The spacing between the individual light beams determines the minimum obstruction size (30 mm) that can be reliably detected within the entire protected area range.

## Type Code

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 265788\_eng.pdf



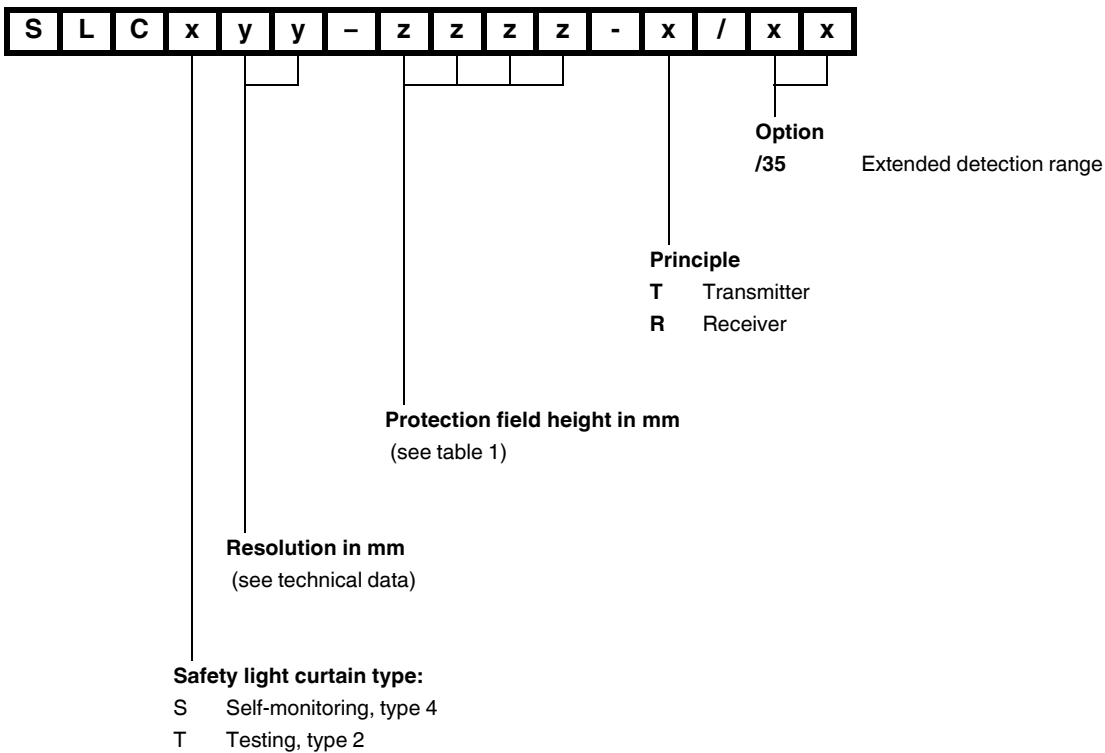

## Application

- Active opto-electronic protective device (AOPD) for protection of people in danger zones and high risk areas
- Hand protection from 30 mm resolution
- Finger protection from 14 mm resolution

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 265788\_eng.pdf